




## Data Transfer Unit

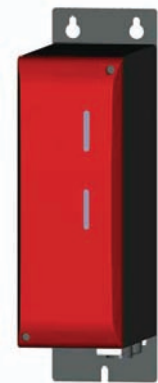

The DTU is a reporting box and tool power supply. There are 2 models of the DTU:

- **DTU Basic** with I/O only
- **DTU Advanced** with I/O and communication to PC or PLC. 10,000 result memory.

Connections: I/O  
RS232  
Ethernet  
Fieldbus (option)

MODEL	PART NUMBER	WIDTH		DIMENSIONS HEIGHT		DEPTH	
		mm	in.	mm	in.	mm	in.
DTU Basic	615 936 045 0	90	3.5	250	9.8	190	7.5
DTU Advanced	615 936 046 0	90	3.5	250	9.8	190	7.5

**Power supply cable**  
including: Power cable + plug

PLUG	DESCRIPTION	PART NO.
A	European 8.2ft (2.5m)	615 917 201 0
B	UK 8.2ft (2.5m)	615 917 202 0
C	US 8.2ft (2.5m)	615 917 203 0




ACCESSORIES	PART NO.
• Probus kit	615 929 021 0
• Devicenet kit	615 929 022 0
• Modbus+ kit	615 929 023 0
• Tool cable 110V 16.4ft (5m)	615 917 485 0
• Tool cable 110V 32.8ft (10m)	615 917 486 0
• Tool cable 110V 49.2ft (15m)	615 917 487 0
• Tool cable 230V 16.4ft (5m)	615 917 480 0
• Tool cable 230V 32.8ft (10m)	615 917 481 0
• Tool cable 230V 49.2ft (15m)	615 917 482 0
• Extension tool cable 32.8ft (10m)	615 917 483 0
• Extension tool cable 65.6ft (20m)	615 917 484 0



# CVIP - Angle Head & In-line Tools

2.2 to 47.9 ft.lb. (3 to 65 Nm)

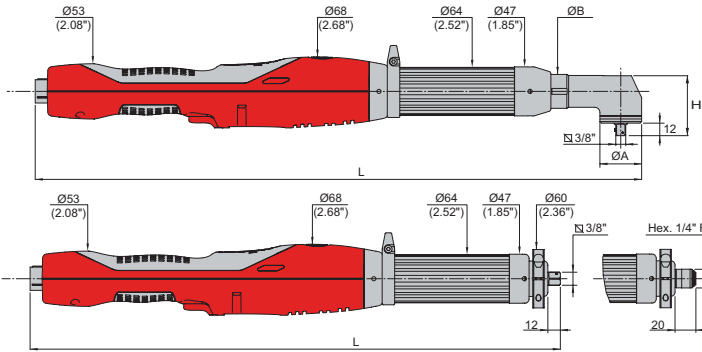

MODEL	ØA		ØB		H	
	mm	in.	mm	in.	mm	in.
EAP1.5-15-	28	1.10	27	1.06	45.5	1.79
EAP1.5-20-	28	1.10	27	1.06	45.5	1.79
EAP1.5-26-	28	1.10	27	1.06	45.5	1.79
EAP2-20-	28	1.10	27	1.06	45.5	1.79
EAP2-30-	28	1.10	27	1.06	45.5	1.79
EAP2-40-	35	1.38	27	1.06	51.5	2.03
EAP2-65-	40	1.57	30.5	1.20	57.5	2.26

MODEL	PART NUMBER	MODEL	PART NUMBER	OUTPUT DRIVE		TORQUE RANGE		ROTATIONAL SPEED	LENGTH L		WEIGHT	
				in.	type	Nm	ft.lb.		mm	in.	kg	lb

## 230V Models

Torque		Torque + Angle		rpm 230V									
<b>Right angle tools</b>													
EAP1.5-15-T-2	615 165 312 0	EAP1.5-15-TA-2	615 165 323 0	3/8	square drive	3-15	2.2-11.0	1020	534.5	21.0	1.85	4.1	
EAP1.5-20-T-2	615 165 313 0	EAP1.5-20-TA-2	615 165 324 0	3/8	square drive	5-20	3.7-14.7	800	534.5	21.0	1.85	4.1	
EAP1.5-26-T-2	615 165 314 0	EAP1.5-26-TA-2	615 165 325 0	3/8	square drive	7-26	5.2-19.2	510	534.5	21.0	1.85	4.1	
EAP2-20-T-2	615 165 315 0	EAP2-20-TA-2	615 165 326 0	3/8	square drive	5-20	3.7-14.7	1320	559.5	22.0	2.0	4.4	
EAP2-30-T-2	615 165 316 0	EAP2-30-TA-2	615 165 327 0	3/8	square drive	7-30	5.2-22.1	1020	559.5	22.0	2.0	4.4	
EAP2-40-T-2	615 165 317 0	EAP2-40-TA-2	615 165 328 0	3/8	square drive	10-40	7.4-29.5	800	570.0	22.4	2.1	4.6	
EAP2-65-T-2	615 165 318 0	EAP2-65-TA-2	615 165 329 0	3/8	square drive	15-65	11-47.9	510	581.5	22.9	2.2	4.8	
<b>In-line tools</b>													
EDP1.5-15-T-2	615 165 319 0	EDP1.5-15-TA-2	615 165 330 0	1/4	hex F	3-15	2.2-11.0	1010	491.5	19.3	1.7	3.7	
EDP2-24-T-2	615 165 320 0	EDP2-24-TA-2	615 165 331 0	1/4	hex F	5-24	3.7-17.7	1390	516.5	20.3	1.8	3.9	
EDP2-33-T-2	615 165 321 0	EDP2-33-TA-2	615 165 332 0	3/8	square drive	7-33	5.2-24.3	1010	508.5	20.0	1.85	4.1	
EDP2-43-T-2	615 165 322 0	EDP2-43-TA-2	615 165 333 0	3/8	square drive	8-43	5.9-31.7	780	508.5	20.0	1.85	4.1	

## 110V Models

Torque		Torque + Angle		rpm 110V									
<b>Right angle tools</b>													
EAP1.5-15-T-1	615 165 334 0	EAP1.5-15-TA-1	615 165 345 0	3/8	square drive	3-15	2.2-11.0	690	534.5	21.0	1.85	4.1	
EAP1.5-20-T-1	615 165 335 0	EAP1.5-20-TA-1	615 165 346 0	3/8	square drive	5-20	3.7-14.7	540	534.5	21.0	1.85	4.1	
EAP1.5-26-T-1	615 165 336 0	EAP1.5-26-TA-1	615 165 347 0	3/8	square drive	7-26	5.2-19.2	340	534.5	21.0	1.85	4.1	
EAP2-20-T-1	615 165 337 0	EAP2-20-TA-1	615 165 348 0	3/8	square drive	5-20	3.7-14.7	890	559.5	22.0	2.0	4.4	
EAP2-30-T-1	615 165 338 0	EAP2-30-TA-1	615 165 349 0	3/8	square drive	7-30	5.2-22.1	690	559.5	22.0	2.0	4.4	
EAP2-40-T-1	615 165 339 0	EAP2-40-TA-1	615 165 350 0	3/8	square drive	10-40	7.4-29.5	540	570.0	22.4	2.1	4.6	
EAP2-65-T-1	615 165 340 0	EAP2-65-TA-1	615 165 351 0	3/8	square drive	15-65	11-47.9	340	581.5	22.9	2.2	4.8	
<b>In-line tools</b>													
EDP1.5-15-T-1	615 165 341 0	EDP1.5-15-TA-1	615 165 352 0	1/4	hex F	3-15	2.2-11.0	680	491.5	19.3	1.7	3.7	
EDP2-24-T-1	615 165 342 0	EDP2-24-TA-1	615 165 353 0	1/4	hex F	5-24	3.7-17.7	940	516.5	20.3	1.8	3.9	
EDP2-33-T-1	615 165 343 0	EDP2-33-TA-1	615 165 354 0	3/8	square drive	7-33	5.2-24.3	680	508.5	20.0	1.85	4.1	
EDP2-43-T-1	615 165 344 0	EDP2-43-TA-1	615 165 355 0	3/8	square drive	8-43	5.9-31.7	525	508.5	20.0	1.85	4.1	

## ACCESSORIES

ITEM	PART NO.
1 Mounting plate with telescopic spindle	615 396 547 0
2 2nd lever start option	615 396 553 0
3 Reaction handle	615 396 554 0
4 Horizontal Bail, included with the tools	615 396 562 0
5 Horizontal Bail, swivel	615 396 529 0
6 Vertical Bail	467003
7 Reaction bar ring, included with the EDP tools	615 396 551 5
• Plastic protective cover EAP.-15 to 30	615 573 064 0
• Plastic protective cover EAP.-40	615 573 065 0
• Plastic protective cover EAP.-65	615 573 066 0
• Power cable EU 230V 5m (16.4ft.)	615 917 470 0
• Power cable EU 230V 5m (16.4ft.) with GFI	615 917 476 0
• Power cable UK 230V 5m (16.4ft.)	615 917 472 0
• Power cable UK 230V 5m (16.4ft.) with GFI	615 917 478 0
• Power cable US 230V 5m (16.4ft.) with GFI	615 917 477 0
• Power cable US 110V 5m (16.4ft.) with GFI	615 917 479 0
• CVIPocket software (Windows mobile 2003)	615 927 558 0

