

Screwdrivers – Shut Off – Push Start




PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT ⁽¹⁾	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET ⁽²⁾	SOUND LEVEL	VIBRATION
			r/min	hex	Nm	Nm	mm	kg	l/s	mm	BSP	dB(A)	ms ⁻²
A	2A89-A-1300	1225434	1300	3mm	0.09-0.56	0.15-0.43	178	0.21	2.2	3	M5	64	<2.5
A	2A89-A-700	1225514	700	3mm	0.09-0.75	0.15-0.43	178	0.21	2.2	3	M5	64	<2.5
A	2A89-A-400	1225694	400	3mm	0.09-0.78	0.15-0.43	178	0.21	2.2	3	M5	64	<2.5
A	2A89-A-1300	1223154	1300	1/4"	0.09-0.56	0.15-0.43	178	0.21	2.2	3	M5	64	<2.5
A	2A89-A-700	1223234	700	1/4"	0.09-0.75	0.15-0.43	178	0.21	2.2	3	M5	64	<2.5
A	2A89-A-400	1223314	400	1/4"	0.09-0.78	0.15-0.43	178	0.21	2.2	3	M5	64	<2.5
B	SB011-AB1600-S4Q	1460644	1600	1/4"	0.4-1.1	0.4-1.1	197	0.42	4.1	5	1/8"	69	<2.5
B	SB015-AB1100-S4Q	1460634	1100	1/4"	0.4-1.5	0.4-1.5	197	0.42	4.1	5	1/8"	69	<2.5
B	SB025-AB750-S4Q	1460624	750	1/4"	0.4-2.5	0.4-2.5	197	0.42	4.1	5	1/8"	69	<2.5
B	SB025-AB500-S4Q	1460684	500	1/4"	0.4-2.5	0.4-2.5	197	0.42	4.1	5	1/8"	69	<2.5
C	SB011-AR1600-S4Q	1460524	1600	1/4"	0.4-1.1	0.4-1.1	197	0.42	4.1	5	1/8"	69	<2.5
C	SB015-AR1100-S4Q	1460514	1100	1/4"	0.4-1.5	0.4-1.5	197	0.42	4.1	5	1/8"	69	<2.5
C	SB025-AR750-S4Q	1460504	750	1/4"	0.4-2.5	0.4-2.5	197	0.42	4.1	5	1/8"	69	<2.5
C	SB025-AR500-S4Q	1460564	500	1/4"	0.4-2.5	0.4-2.5	197	0.42	4.1	5	1/8"	69	<2.5
D	SC021-AB2300-S4Q	1461854	2300	1/4"	0.4-2.1	0.4-0.9	250	0.61	6.5	6	1/8"	75	<2.5
D	SC021-AB1600-S4Q	1461864	1600	1/4"	0.4-2.1	0.6-2.1	250	0.61	6.5	6	1/8"	75	<2.5
D	SC043-AB1100-S4Q	1461874	1100	1/4"	0.4-4.3	0.9-4.3	250	0.61	6.5	6	1/8"	75	<2.5
D	SC047-AB550-S4Q	1461884	550	1/4"	0.4-4.7	0.9-4.7	250	0.61	6.5	6	1/8"	75	<2.5
E	SC021-A2300-S4Q	1456574	2300	1/4"	0.4-2.1	0.4-0.9	250	0.61	6.5	6	1/8"	73	<2.5
E	SC021-A1600-S4Q	1456584	1600	1/4"	0.4-2.1	0.6-2.1	250	0.61	6.5	6	1/8"	73	<2.5
E	SC043-A1100-S4Q	1456594	1100	1/4"	0.4-4.3	0.9-4.3	250	0.61	6.5	6	1/8"	73	<2.5
E	SC047-A550-S4Q	1456604	550	1/4"	0.4-4.7	0.9-4.7	250	0.61	6.5	6	1/8"	73	<2.5
F	SD023-AB3500-S4Q	1462834	3500	1/4"	1.0-2.3	1.0-2.3	227	0.73	8.7	10	1/4"	73	<2.5
F	SD035-AB2200-S4Q	1462824	2200	1/4"	1.0-3.5	1.0-3.5	227	0.73	8.7	10	1/4"	73	<2.5
F	SD075-AB1470-S4Q	1462814	1470	1/4"	2.0-5.5	2.0-5.5	253	0.89	8.7	10	1/4"	73	<2.5
F	SD075-AB1100-S4Q	1462804	1100	1/4"	2.5-7.5	2.5-7.5	253	0.89	8.7	10	1/4"	73	<2.5
F	SD100-AB820-S4Q	1462794	820	1/4"	3.5-10.0	3.5-10.0	253	0.89	8.7	10	1/4"	73	<2.5
F	SD140-AB510-S4Q	1462784	510	1/4"	3.5-14.0	3.5-10.0	253	0.89	8.7	10	1/4"	73	<2.5
F	SD160-AB320-S4Q	1462774	320	1/4"	3.5-16.0	3.5-10.0	253	0.89	8.7	10	1/4"	73	<2.5
G	SD023-AR3500-S4Q	1462764	3500	1/4"	1.0-2.3	1.0-2.3	227	0.73	8.7	10	1/4"	73	<2.5
G	SD035-AR2200-S4Q	1462754	2200	1/4"	1.0-3.5	1.0-3.5	227	0.73	8.7	10	1/4"	73	<2.5
G	SD055-AR1470-S4Q	1462744	1470	1/4"	2.0-5.5	2.0-5.5	253	0.89	8.7	10	1/4"	73	<2.5
G	SD075-AR1100-S4Q	1462734	1100	1/4"	2.5-7.5	2.5-7.5	253	0.89	8.7	10	1/4"	73	<2.5
G	SD100-AR820-S4Q	1462724	820	1/4"	3.5-10.0	3.5-10.0	253	0.89	8.7	10	1/4"	73	<2.5
G	SD140-AR510-S4Q	1462714	510	1/4"	3.5-14.0	3.5-10.0	253	0.89	8.7	10	1/4"	73	<2.5
G	SD160-AR320-S4Q	1462704	320	1/4"	3.5-16.0	3.5-10.0	253	0.89	8.7	10	1/4"	73	<2.5

⁽¹⁾ Types D to E, 5/16" hex bit holder optional. Types B to C, 1/4" double ended bit holder optional

⁽²⁾ Types B to G, NPT optional

A side handle should be fitted for torques over 4Nm (SD tools are supplied with a side handle as standard)

Screwdrivers – Shut Off – Lever Start

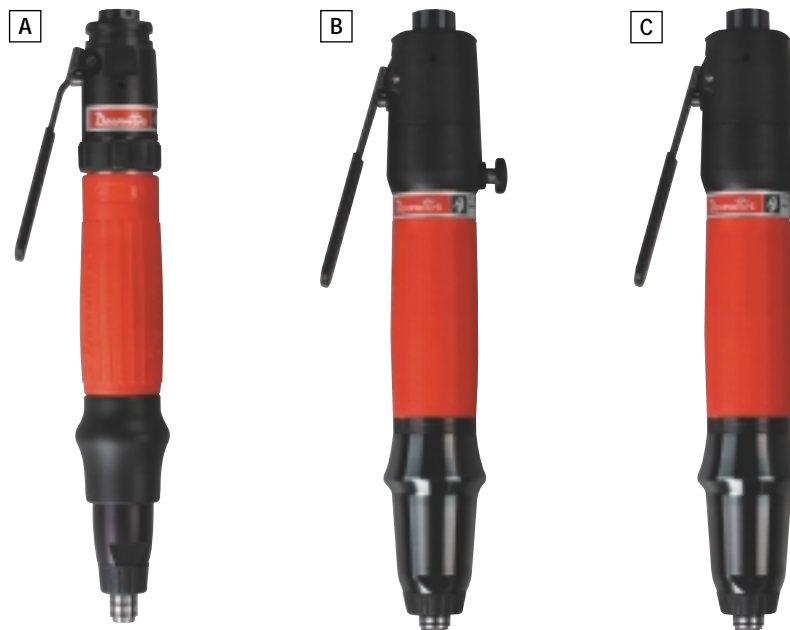

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT ⁽¹⁾	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET ⁽²⁾	SOUND LEVEL	VIBRATION
			r/min	hex	Nm	Nm							
A	SC021-L2300-S4Q	1456654	2300	1/4"	0.4-2.1	0.4-0.9	275	0.68	6.5	6	1/8"	73	<2.5
A	SC021-L1600-S4Q	1456664	1600	1/4"	0.4-2.1	0.6-2.1	275	0.68	6.5	6	1/8"	73	<2.5
A	SC043-L1100-S4Q	1456674	1100	1/4"	0.4-4.3	0.9-4.3	275	0.68	6.5	6	1/8"	73	<2.5
A	SC047-L550-S4Q	1456684	550	1/4"	0.4-4.7	0.9-4.7	275	0.68	6.5	6	1/8"	73	<2.5
B	SD023-LB3500-S4Q	1463094	3500	1/4"	1.0-2.3	1.0-2.3	252	0.76	8.7	10	1/4"	73	<2.5
B	SD035-LB2200-S4Q	1463084	2200	1/4"	1.0-3.5	1.0-3.5	252	0.76	8.7	10	1/4"	73	<2.5
B	SD055-LB1470-S4Q	1463074	1470	1/4"	2.0-5.5	2.0-5.5	278	0.92	8.7	10	1/4"	73	<2.5
B	SD075-LB1100-S4Q	1463064	1100	1/4"	2.5-7.5	2.5-7.5	278	0.92	8.7	10	1/4"	73	<2.5
B	SD100-LB820-S4Q	1463054	820	1/4"	3.5-10.0	3.5-10.0	278	0.92	8.7	10	1/4"	73	<2.5
B	SD140-LB510-S4Q	1463044	510	1/4"	3.5-14.0	3.5-10.0	278	0.92	8.7	10	1/4"	73	<2.5
B	SD160-LB320-S4Q	1463034	320	1/4"	3.5-16.0	3.5-10.0	278	0.92	8.7	10	1/4"	73	<2.5
C	SD023-LR3500-S4Q	1463024	3500	1/4"	1.0-2.3	1.0-2.3	252	0.76	8.7	10	1/4"	73	<2.5
C	SD035-LR2200-S4Q	1463014	2200	1/4"	1.0-3.5	1.0-3.5	252	0.76	8.7	10	1/4"	73	<2.5
C	SD055-LR1470-S4Q	1463004	1470	1/4"	2.0-5.5	2.0-5.5	278	0.92	8.7	10	1/4"	73	<2.5
C	SD075-LR1100-S4Q	1462994	1100	1/4"	2.5-7.5	2.5-7.5	278	0.92	8.7	10	1/4"	73	<2.5
C	SD100-LR820-S4Q	1462984	820	1/4"	3.5-10.0	3.5-10.0	278	0.92	8.7	10	1/4"	73	<2.5
C	SD140-LR510-S4Q	1462974	510	1/4"	3.5-14.0	3.5-10.0	278	0.92	8.7	10	1/4"	73	<2.5
C	SD160-LR320-S4Q	1462964	320	1/4"	3.5-16.0	3.5-10.0	278	0.92	8.7	10	1/4"	73	<2.5

⁽¹⁾ 5/16" hex bit holder optional for type A

⁽²⁾ NPT optional

A side handle should be fitted for torques over 4Nm (SD tools are supplied with a side handle as standard)

Screwdrivers – Shut Off – Pistol Grip



PUSH AND TRIGGER START

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET ⁽²⁾	SOUND LEVEL	VIBRATION
			r/min	hex	Nm	Nm	mm	kg	l/s	mm	BSP	dB(A)	ms ⁻²
A	SBP021-T2300-S4Q	1462144	2300	1/4"	0.4-2.1	0.4-2.1	182	0.82	6.5	6	1/8"	73	<2.5
A	SBP021-T1600-S4Q	1462154	1600	1/4"	0.4-2.1	0.4-2.1	182	0.82	6.5	6	1/8"	73	<2.5
A	SBP043-T1100-S4Q	1462164	1100	1/4"	0.4-4.3	1.8-4.3	182	0.82	6.5	6	1/8"	73	<2.5
A	SBP047-T550-S4Q	1462174	550	1/4"	0.4-4.7	1.8-4.7	182	0.82	6.5	6	1/8"	73	<2.5

TRIGGER START

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT ⁽¹⁾	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET ⁽²⁾	SOUND LEVEL	VIBRATION
			r/min	hex	Nm	Nm	mm	kg	l/s	mm	BSP	dB(A)	ms ⁻²
B	SCP021-T2300-S4Q	1456734	2300	1/4"	0.4-2.1	0.4-0.9	228	0.86	6.5	6	1/8"	73	<2.5
B	SCP021-T1600-S4Q	1456744	1600	1/4"	0.4-2.1	0.6-2.1	228	0.86	6.5	6	1/8"	73	<2.5
B	SCP043-T1100-S4Q	1456754	1100	1/4"	0.4-4.3	0.9-4.3	228	0.86	6.5	6	1/8"	73	<2.5
B	SCP047-T550-S4Q	1456764	550	1/4"	0.4-4.7	0.9-4.7	228	0.86	6.5	6	1/8"	73	<2.5
C	SCPT021-A2300-S4Q	1458974	2300	1/4"	0.4-2.1	0.4-0.9	230	0.86	6.5	6	1/8"	73	<2.5
C	SCPT021-A1600-S4Q	1458934	1600	1/4"	0.4-2.1	0.6-2.1	230	0.86	6.5	6	1/8"	73	<2.5
C	SCPT043-A1100-S4Q	1458894	1100	1/4"	0.4-4.3	0.9-4.3	230	0.86	6.5	6	1/8"	73	<2.5
C	SCPT047-A550-S4Q	1458854	550	1/4"	0.4-4.7	0.9-4.7	230	0.86	6.5	6	1/8"	73	<2.5
D	2D89-PX-2200	1455874	2200	1/4"	0.9-3.6	0.9-3.5	227	1.2	8	10	1/4"	72	<2.5
D	2D89-PX-1500	1455854	1500	1/4"	0.9-4.5	0.9-3.5	240	1.2	8	10	1/4"	72	<2.5
D	2D89-PX-850	1455834	850	1/4"	1.5-6.8	1.5-6.6	240	1.2	8	10	1/4"	72	<2.5
D	2D89-PX-540	1455814	540	1/4"	1.5-10.7	2.0-10.7	240	1.2	8	10	1/4"	72	<2.5
D	2D89-PX-340	1455794	340	1/4"	3.6-16.6	3.6-16.6	252	1.2	8	10	1/4"	72	<2.5
E	2F89-PX-2200	1336914	2200	1/4"	1.9-5.1	0.9-3.5	223	1.3	9.4	10	1/4"	82	<2.5
E	2F89-PX-1100	1337144	1100	1/4"	1.8-9.0	1.8-5.4	245	1.4	9.4	10	1/4"	82	<2.5
E	2F89-PX-650	1337724	650	1/4"	1.6-12.3	1.6-5.4	245	1.4	9.4	10	1/4"	82	<2.5
E	2F89-PX-450	1337984	450	1/4"	1.6-11.9	1.6-5.4	245	1.4	9.4	10	1/4"	82	<2.5
E	2F89-PX-750	1337304	750	1/4"	3.5-14.0	3.5-14.0	257	1.5	9.4	10	1/4"	82	<2.5
E	2F89-PX-500	1337564	500	1/4"	3.5-15.6	3.5-15.6	257	1.5	9.4	10	1/4"	82	<2.5

⁽¹⁾ Types B, C, D and E, 5/16" hex bit holder optional

⁽²⁾ NPT optional

⁽³⁾ Types B and C are available with a steel nose

A side handle should be fitted for torques over 10Nm