


RediPower Screwdrivers

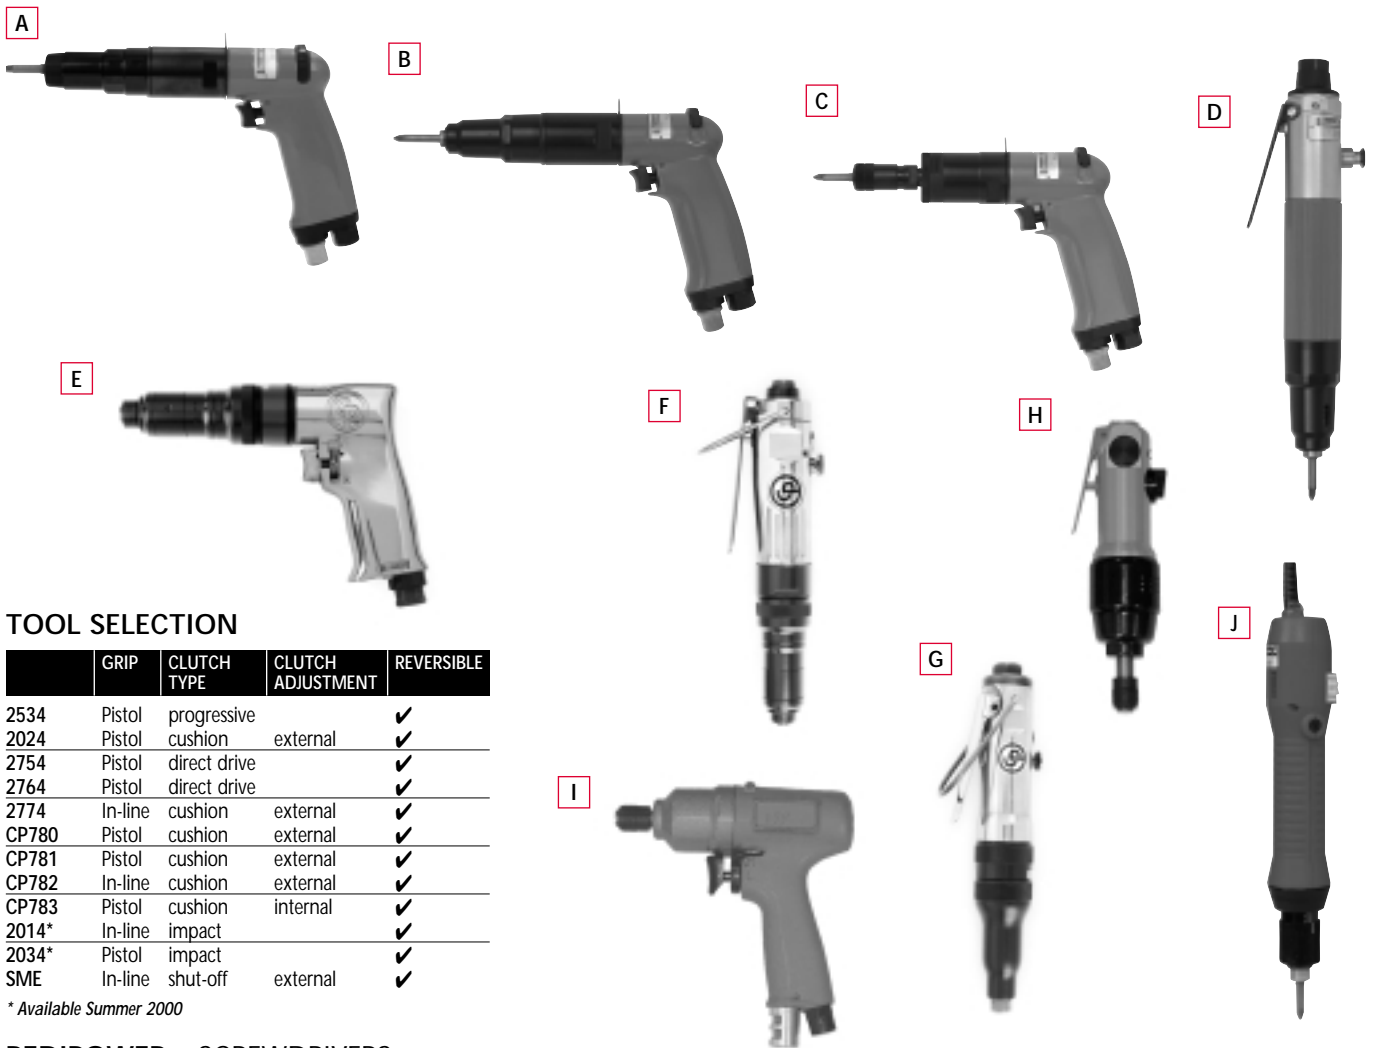

TOOL SELECTION

	GRIP	CLUTCH TYPE	CLUTCH ADJUSTMENT	REVERSIBLE
2534	Pistol	progressive		✓
2024	Pistol	cushion	external	✓✓
2754	Pistol	direct drive		✓✓
2764	Pistol	direct drive		✓✓
2774	In-line	cushion	external	✓✓
CP780	Pistol	cushion	external	✓✓
CP781	Pistol	cushion	external	✓✓
CP782	In-line	cushion	external	✓✓
CP783	Pistol	cushion	internal	✓✓
2014*	In-line	impact		✓✓
2034*	Pistol	impact		✓✓
SME	In-line	shut-off	external	✓

* Available Summer 2000

REDIPOWER – SCREWDRIVERS

SPECIFICATION

PICTURE REF	MODEL	PART NO	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		NOISE LEVEL	SOUND POWER	VIBRATION	OVERALL LENGTH		NET WEIGHT	
				MIN.	MAX.	MIN.	MAX.	cfm	l/s ¹				in.	mm	lb	kg
A	2534	2534	900		77	8.7	18	8.5	77		25.6	9.1	230	2.4	1.1	
B	2024	2024	900		60	6.8	17	8	77		<2.5	9.6	244	2.4	1.1	
C	2754	2754	1450		44	5.0	17	8	77		<2.5	8.3	210	2.0	0.9	
C	2764	2764	600		124	14.0	17	8	77		<2.5	9.0	228	2.2	1.0	
D	2774	2774	1050		60	6.8	17	8	73		4.2-10	9.6	244	2.2	1.0	
E	CP780	TO25095	1800	13	1.47	44	4.87	21	10	98.3	108.3	2.6	8.2	208	2.58	1.2
E	CP781	TO25096	800	14	1.55	100	11	20	9.4	99.5	109.5	<2.5	8.8	224	2.95	1.4
F	CP782	TO25097	1800	9.5	1.04	44	4.84	15.8	7.5	93.9	103.9	12	9.6	244	2.44	1.2
G	CP783	TO25098	2000	2.7	0.3	13	1.46	9.5	4.5	88.1	98.1	4.1	8.8	223	1.39	0.7
H	2014	2014	10000	22*	30	34*	46	11.6	5.5	88	98	5	8.4	214	1.8	0.8
I	2034	2034	11200	6*	8	35*	47	18.9	8.9	87	97	3.6	6.0	153	2.2	1.0
PICTURE REF	MODEL	PART NO	FREE SPEED	TORQUE RANGE				VOLTAGE	NOISE LEVEL	SOUND POWER	VIBRATION	OVERALL LENGTH		NET WEIGHT		
				MIN.	MAX.	MIN.	MAX.					V	in.	mm	lb	kg
J	SME021-A1000-S4Q	1462224	1000	4.3	0.49	19.1	2.16	120	61		<2.5	10.4	264	2.3	1.05	
J	SME021-A700-S4Q	1462234	700	8.7	0.98	26.0	2.94	120	60		<2.5	10.6	269	2.3	1.05	
J	SME021-A500-S4Q	1462244	500	13.0	1.47	34.6	3.92	120	60		<2.5	10.6	269	2.3	1.05	
J	SME021-A1000-S4Q	1458554	1000	4.3	0.49	19.1	2.16	230	61		<2.5	10.4	264	2.3	1.05	
J	SME021-A700-S4Q	1458604	700	8.7	0.98	26.0	2.94	230	60		<2.5	10.6	269	2.3	1.05	
J	SME021-A500-S4Q	1458624	500	13.0	1.47	34.6	3.92	230	60		<2.5	10.6	269	2.3	1.05	

Note: 120V versions of SME not for sale within Europe.

* Indicates torque stated is ftlb

Lou Zampini & Associates

2 Douglas Pike, Rt. 7

Smithfield, RI 02917

1 800 353 4676

FAX 1 401 679 0165



Chicago Pneumatic

