

# Impulse - Shut Off and Non Shut Off

5 to 450 Nm (4 to 332 ft.lb) - 2800 to 10000 rpm

Lou Zampini & Associates

2 Douglas Pike


Smithfield, RI 02917

401 354 8878 , 1800 353 4676

FAX 401 353 0113

<http://www.LouZampini.com>

<http://www.PneumaticToolsOnline.com>

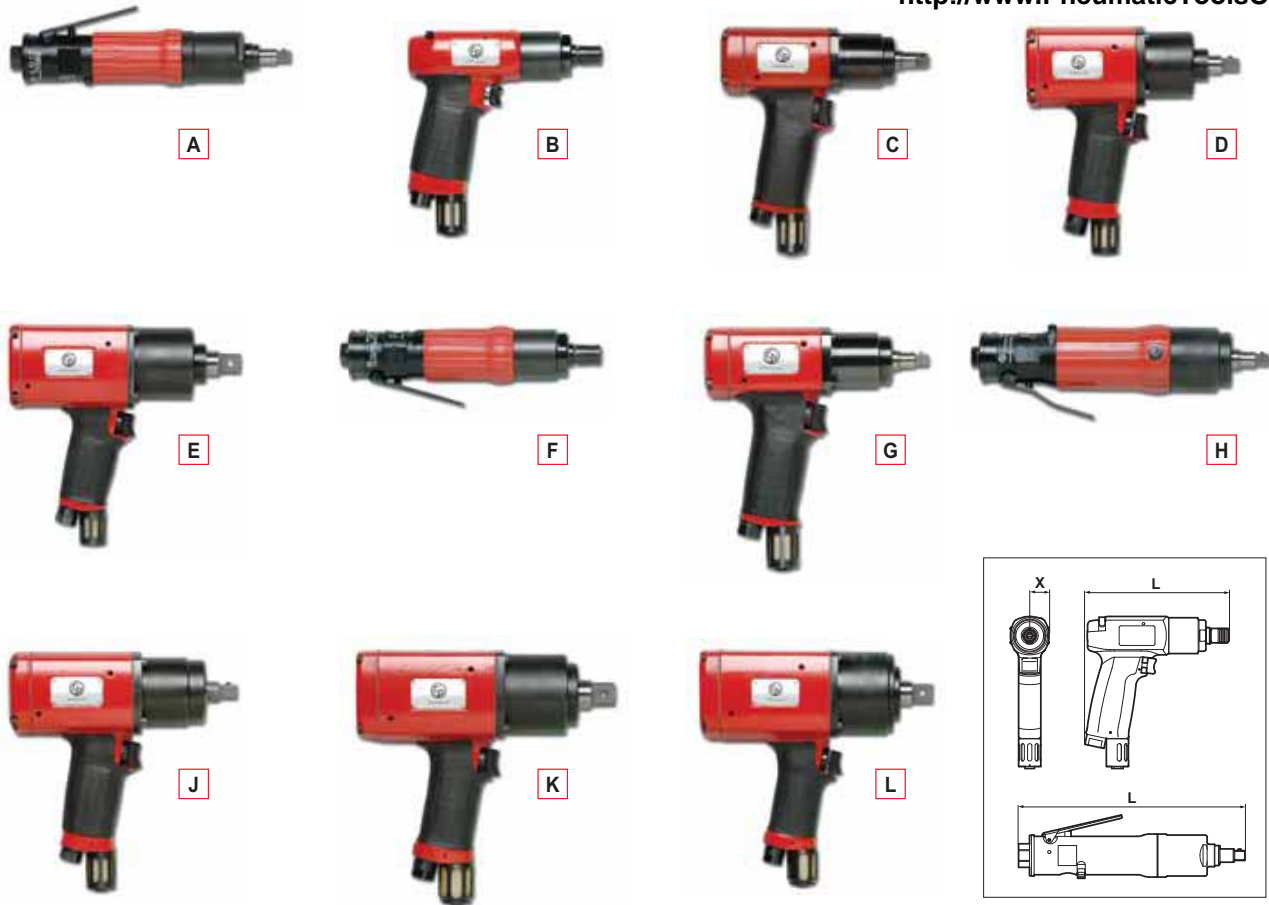

(1) NPT optional

Accessories: see page 85

PIC REF	MODEL	PART NUMBER	FREE SPEED	OUTPUT	TORQUE RANGE		DIMENSIONS				WEIGHT		AIR FLOW		AIR INLET BSP <sup>(1)</sup>		HOSE INT. Ø	
					Nm	ft.lb	L	X	kg	lb.	l/s	cfm	in.	mm	in.	mm	in.	
			rpm	in.			mm	in.	mm	in.								
<b>NON SHUT OFF</b>																		
A	PT031-L10000-I10S	205 147 466 4	10000	Sq 3/8	20-31	15-23	221	8.7	22	0.87	0.7	1.5	8	17	1/4	8	5/16	
B	PT031-T9000-I10S	205 147 467 4	9000	Sq 3/8	20-31	15-23	152	5.98	22	0.87	0.8	1.8	8	17	1/4	8	5/16	
B	PT052-T7000-I10S	205 147 468 4	7000	Sq 3/8	30-52	22-38	174	6.85	23	0.90	1.0	2.0	9	19	1/4	10	3/8	
C	PT070-T6000-I13S	205 147 469 4	6000	Sq 1/2	50-70	37-52	168	6.61	26	1.02	1.3	2.9	11	23	1/4	10	3/8	
D	PT110-T4500-I13S	205 147 470 4	4500	Sq 1/2	65-110	48-81	178	7.0	29	1.14	1.6	3.5	12	25	1/4	10	3/8	
D	PT160-T3500-I13S	205 147 471 4	3500	Sq 1/2	110-160	81-118	188	7.4	34	1.34	2.4	5.3	14	30	3/8	13	1/2	
E	PT240-T2800-I19S	205 147 472 4	2800	Sq 3/4	160-240	118-177	205	8.07	37	1.46	3.3	7.3	15	32	3/8	13	1/2	
<b>SHUT OFF</b>																		
B	PT010-T5500-S4Q	205 146 227 4	5500	Hex 1/4	5-10	4-7	205	8.07	21	0.83	0.95	2.1	6	13	1/4	8	5/16	
F	PT010-L5000-S4Q	205 146 225 4	5000	Hex 1/4	5-10	4-7	212	8.34	21	0.83	0.9	1.9	6	13	1/4	8	5/16	
B	PT014-T6000-S4Q	205 146 228 4	6000	Hex 1/4	8-14	6-10	205	8.07	21	0.83	1.0	2.2	6	13	1/4	8	5/16	
F	PT014-L6000-S4Q	205 146 226 4	6000	Hex 1/4	8-14	6-10	212	8.34	21	0.83	0.9	2.0	6	13	1/4	8	5/16	
G	PT025-T4500-S10S	205 147 462 4	4500	Sq 3/8	13-25	10-18	177	6.96	26	1.02	1.3	2.9	7	15	1/4	8	5/16	
H	PT025-L4500-S10S	205 147 463 4	4500	Sq 3/8	13-25	10-18	236	9.29	25	0.98	1.2	2.5	7	15	1/4	8	5/16	
G	PT040-T6000-S10S	205 146 229 4	6000	Sq 3/8	22-40	16-29	177	6.96	26	1.02	1.4	3.0	8	17	1/4	8	5/16	
J	PT070-T4000-S13S	205 146 230 4	4000	Sq 1/2	32-70	24-51	192	7.55	29	1.14	1.8	4.0	10	21	1/4	10	3/8	
J	PT125-T3500-S13S	205 146 231 4	3500	Sq 1/2	62-125	46-92	201	7.91	34	1.34	2.4	5.3	12	25	1/4	10	3/8	
K	PT250-T4000-S19S	205 147 464 4	4000	Sq 3/4	125-250	92-185	216	8.5	37	1.46	3.3	7.2	20	42	3/8	13	1/2	
L	PT450-T3000-S19S	205 147 465 4	3000	Sq 3/4	225-450	166-332	202	7.95	42	1.65	4.3	9.5	22	46	3/8	13	1/2	

